

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 0 404 463 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**05.06.1996 Bulletin 1996/23**

(51) Int Cl.<sup>6</sup> **G02B 5/08, B32B 7/02**

(21) Application number: **90306584.5**

(22) Date of filing: **15.06.1990**

(54) **Reflective polymeric body**

Reflektierender polymerer Mehrschichtkörper

Corps polymère réfléchissant à plusieurs couches

(84) Designated Contracting States:  
**AT BE CH DE DK ES FR GB GR IT LI LU NL SE**

• **Schrenk, Walter J.**  
**Midland, Michigan 48640 (US)**

(30) Priority: **20.06.1989 US 368695**  
**11.01.1990 US 463645**  
**17.01.1990 US 466168**

(74) Representative: **Burford, Anthony Frederick et al**  
**W.H. Beck, Greener & Co.**  
**7 Stone Buildings**  
**Lincoln's Inn**  
**London WC2A 3SZ (GB)**

(43) Date of publication of application:  
**27.12.1990 Bulletin 1990/52**

(73) Proprietor: **THE DOW CHEMICAL COMPANY**  
**Midland, Michigan 48640 (US)**

(56) References cited:  
**GB-A- 2 015 812** **GB-A- 2 066 155**  
**US-A- 3 560 076** **US-A- 3 711 176**

(72) Inventors:  
• **Wheatley, John A.**  
**Midland, Michigan 48640 (US)**

**EP 0 404 463 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**Description**

The present invention relates to a multilayered polymeric body, which reflects light and which can be fabricated to have a silvery or hued (i.e., copper, gold, etc.) metallic or nonconventional hued (i.e., blue, green, etc.) appearance, and to articles produced therefrom which may find use as mirrors, reflectors, lenses and polarizers.

Conventional methods for fabricating reflective surfaces include forming such surfaces of highly polished metals. Because of the high costs and fabricating problems involved in using metals, more recently fabricators have used plastic surfaces which contain thin coatings of metal thereon. Thus, metal coated plastic articles are now commonly found as both decorative and functional items in a number of industries. Such articles are used as bright work for consumer appliances such as refrigerators, dishwashers, washers, dryers and radios. These types of articles are also used by the automotive industry as head lamp reflectors, bezels, radio knobs and automotive trim.

Typically, such metal coated plastic articles are formed by electroplating or by the vacuum, vapor, or chemical deposition of a thin metal layer on the surface of the article. Such coatings are subject to the chipping and flaking of the metal coatings as well as corrosion of the metal over time. If additional protective layers must be applied over the metal coating to protect it, additional labor and materials costs are involved. Further, there may be environmental disposal problems with some metal deposition processes.

Multilayer articles of polymers are known, as are methods and apparatuses for making such articles. For example, such multilayered articles may be prepared utilizing multilayer coextrusion devices as described in US-A-3,773,882 and US-A-3,884,606. Such devices are capable of simultaneously extruding diverse thermoplastic polymeric materials in substantially uniform layer thicknesses. The number of layers may be multiplied by the use of a device as described in US-A-3,759,647.

Im et al, US-A-4,540,623, teaches a multilayer laminated article which includes a polycarbonate as one of the alternating layers. The articles of Im, however, are intended to be transparent rather than reflective and to exhibit optical properties comparable to a pure polycarbonate polymer.

Alfrey, Jr. et al, US-A-3,711,176, teaches a multilayered highly reflective thermoplastic body fabricated using thin film techniques. That is, the reflective thin film layers of Alfrey, Jr. relied on the constructive interference of light to produce reflected visible, ultraviolet, or infrared portions of the electromagnetic spectrum. Such reflective thin films have found use in decorative items because of the iridescent reflective qualities of the film.

However, the films of Alfrey, Jr. are extremely sensitive to thickness changes, and it is characteristic of such films to exhibit streaks and spots of nonuniform color. Further, color reflected by such films is dependent on the angle of incidence of light impinging on the film. Thus, such films are not practical for uses which require uniformity of reflectivity. Moreover, such films are not practical to thermoform into articles as localized thinning of the layers during thermoforming causes alterations in the reflective characteristics of the films.

Accordingly, there remains a need in the art for a polymeric reflective sheet or body which can be fabricated into a variety of parts without alteration of the uniform reflective appearance of the material over a range of processing conditions and part geometry. Further, there is a need for a reflective polymeric sheet or body which can be post formed without alteration of the uniform reflective appearance of the material. Still further, there is a need for silvery or metallic appearing articles which do not use metal.

The present invention meets those needs by providing a multilayered polymeric reflective body which is post formable and capable of being fabricated into films, sheets, and a variety of parts while maintaining a uniform highly reflective appearance. The reflective body comprises alternating layers of diverse polymeric materials which differ in refractive index and which are either optically thick or optically very thin. While the alternating layers must differ in refractive index, the optically thick and optically very thin layers can be arranged in any order. That is, the reflective body may be comprised of all optically thick layers, or alternating optically thick and optically very thin layers, or any other combination of optically thick and optically very thin layers. The optically thick layers are too thick to cause visible iridescent effects (visually perceived as a variety of colors), while the optically very thin layers are too thin to cause such effects. The resulting multilayered polymeric body reflects substantially white light and exhibits a silvery, metallic appearance.

The terms "reflective", "reflectivity", "reflection", and "reflectance" as used herein refer to total reflectance (i.e., ratio of reflected wave energy to incident wave energy) sufficiently specular in nature such that the polymeric body has a metallic appearance. The use of these terms is intended to encompass semi-specular or diffuse reflection such as that of brushed metal and pewter. In general, reflectance measurement refers to reflectance of light rays into an emergent cone with a vertex angle of 15 degrees centered around the specular angle.

A specific intensity of reflectance, when used herein, is the intensity of reflection which occurs at a wavelength where negligible absorption occurs. For example, a silver appearing article reflects substantially all visible wavelengths, whereas the introduction of a dye to achieve other metallic hues will necessarily lower reflectivity of the body at the absorbing wavelengths. Wavelengths unaffected by the dye will be reflected at essentially the same intensity as a non-dyed sample, and it is at these unaffected wavelengths to which the intensity of reflection is referring.

According to the present invention, there is provided a reflective polymeric body of at least first and second diverse

polymeric materials and having a plurality of alternating layers of said first and second polymeric materials differing from each other in refractive index by at least 0.03, characterized in that at least 75 percent of the individual layers of said body have an optical thickness which is either not more than 0.09 micrometers or not less than 0.45 micrometers, with at least one of the individual layers having an optical thickness not less than 0.45 micrometers, and the number of said alternating layers is such that substantially no visible iridescence can be perceived in the light reflected by the body.

A number of substantially transparent polymers are suitable for use in the present invention. In a preferred embodiment of the invention, the first polymeric material is polycarbonate or rigid or flexible polyurethane and the second polymeric material is polymethyl methacrylate or polyether amide. The polymeric body may also comprise three or more alternating layers of diverse polymeric materials. In one embodiment using a three layer pattern of repeating units ABCBA, the first (A) polymeric material is polystyrene, the second (B) material is a styrenehydroxy ethylacrylate copolymer, and the third (C) polymeric material is polymethyl methacrylate. Alternatively, the first and third materials may be the same, and the second (B) material may be a copolymer of styrene and methyl-methacrylate.

For some three layer combinations, the B layer may not only contribute to the reflective properties of the body but may also act as an adhesive layer to bond the A and C layers in the multilayer body. It is not necessary that the refractive index mismatch of the B layer with the other two layers be at least 0.03. For example, the refractive index of the polymer making up the B layer may be intermediate that of the A and C layers.

Other three layer repeating patterns are also possible. For example, an ABCABC repeating pattern may be used where the polymer making up the third polymer layer may be placed in the multilayer body as a barrier layer or toughening layer. When the third polymer layer is a barrier layer, it may be present as a single layer on one or both exterior surfaces of the body or as an interior layer. For example, suitable barrier layer materials such as hydrolyzed ethylene vinyl acetate, copolymers of polyvinylidene chloride, nitrile polymers, and nylons may be used in or on the multilayer body. Suitable adhesive materials such as maleic anhydride grafted polyolefins may be used to bond such barrier layer materials to the multilayer body.

Also, the third polymer layer may be found as a surface or skin layer on one or both major exterior surfaces for an ABABAB repeating body or as an interior layer. The skin layer may be sacrificial, or may be permanent and serve as a scratch resistant or weatherable protective layer. Further, such skin layers may be post applied to the body after coextrusion. For example, a skin layer may be applied as a sprayed on coating which would act to level the surface of the body to improve optical properties and impart scratch resistance, chemical resistance and/or weatherability. The skin layer may also be laminated to the multilayered body. Lamination is desirable for those polymers which are not readily coextrudable.

In one embodiment of the invention, the polymeric body is coextruded and every other layer in the two layer ABABAB repeating body is a thick optical layer of 0.45 micrometers or greater while the other layer is a very thin optical layer of 0.09 micrometers or less. For a polymeric body having ABCBA repeating layers, any or all of the three layers may be thick, with the other layers being very thin optical layers.

In certain embodiments of the invention, it is desirable to form the reflective polymeric body to comprise at least 500 layers. Increasing the number of layers in the polymeric body has been found to increase its reflectivity (i.e., the percentage of incident light reflected from the body). Thus, by controlling the number of layers, the degree of reflectivity of the article may be controlled.

In some embodiments of the invention it may be desirable to incorporate coloring agents such as dyes or pigments into one or more of the individual layers of the polymeric body. This can be done to one or both of the outer or skin layers of the body, or alternatively, the coloring agent may be incorporated into one or more interior layers in the body. The coloring agents may be selected to give the polymeric body a metallic appearance other than its normal silvery appearance such as bronze, copper, or gold, for example.

Different colors such as black, blue, red, yellow, and white may also be used. Typically, it is most desirable to use pigmented coloring agents in the interior layers to provide opaqueness and a two-sided mirror-like reflective quality and to use dyes on exterior surface layers. Coloring agents may be used in combination to provide desirable coloring and optical properties. For example, a pigmented white coloring agent may be used in an interior surface while a colored dye, such as blue, yellow, red, or green may be included on one or more surface layers to provide a unique reflective colored effect.

Further, while the normal surface of the body is smooth to give a highly reflective silver appearance, in some instances it may be desirable to give the surface of the body a roughened or brushed appearance to simulate a brushed metallic appearance. Further, a solvent may be used to etch the surface of the multilayer body to provide a matte or pewter look to the body. Additionally, the body may be embossed with a variety of patterns to provide desirable optical effects.

The reflective polymeric body of the present invention may find several applications. In another embodiment of the invention, the reflective body may be fabricated as a mirror-like polymeric article.

To provide the mirror-like quality to the article, one of the major surfaces includes a light absorbent layer, such as

a layer of a black or other colored pigment. The light absorbent layer may be coextruded or applied as a lacquer or paint. Alternatively, increasing the number of individual layers to above 500 results in increased reflectance of incident light from the article resulting in a mirror-like quality in the article.

The reflective polymeric body of the present invention may also be fabricated to appear mirror-like on all major surfaces by coextruding a light absorbing layer in the interior of the article.

The reflective polymeric body of the present invention may also be fabricated to act as a birefringent light polarizer which polarizes a broad band of the electromagnetic spectrum. In a preferred embodiment, the difference in refractive index between the first and second polymeric materials is caused by selecting polymers having differing stress optical coefficients and then stretching those materials in a uniaxial direction to orient the polymeric materials.

Because very thin optical layers can be used for some of the layers in the multilayer body, reflective films having overall thicknesses of 0.01 inches (0.25 mm) or less may be fabricated. Further, the use of very thin optical layers results in reflected images which are sharper and better focused than possible using only thick optical films. Additionally, the use of very thin optical layers permits the fabrication of a body using up to 80 percent or more by volume of one polymer (the thicker layers) with less than 20 percent by volume of a second polymer (the thinner layers). This results in a very strong laminate structure which approximates the physical properties of the single polymer.

Further, the use of the combination of thick and very thin optical layers results in a laminate which does not whiten or appear to craze when impacted. For example, in a typical thick ductile/very thin brittle combination such as polycarbonate/polymethyl methacrylate, a multilayer stack of all optically thick layers will whiten under light impact. The thick/very thin combination of layers of the present invention do not exhibit crazing (although some crazing may occur, it is not visible to the eye) or whitening when impacted.

Additionally, the multilayer reflective polymeric bodies of the present invention may be formed into a number of decorative and/or structural parts. The bodies may be formed by coextrusion techniques initially into sheets which may then be post formed. Such post forming operations may include thermoforming, vacuum forming, or pressure forming. Further, through the use of forming dies, the multilayer reflective body may be initially formed into a variety of useful shapes including profiles, tubes, parisons which can then be formed into blow-molded containers.

Accordingly, it is an object of the present invention to provide a reflective polymeric body which can be fabricated into films, sheets, and a variety of parts, is post formable, and which has a uniformly reflective appearance. This, and other objects and advantages of the invention will become apparent from the following detailed description, the accompanying drawing, and the appended claims.

In order that the invention may be more readily understood, reference will now be made by example to the accompanying drawings, in which figures 1a and 1b show the relationship among percent reflection of light, difference in refractive index ( $\Delta N$ ), and number of layers for a two component system of polymers made in accordance with the present invention. The relationship holds true for any two component system. Further, while the plot goes up to 5000 layers and up to a refractive index difference of 0.15, it is within the scope of the invention to have polymeric bodies of greater than 5000 layers and/or refractive index differences of greater than 0.15.

The present invention provides a highly reflective multilayer polymeric body made up of from a hundred to several thousand alternating thick layers of polymers which differ from each other in refractive index. The reflective body may be made up entirely of optically thick layers. However, the use of optically very thin layers, in combination with optically thick layers, enables the formation of thinner films and sheets. Preferably, the individual layers which make up the multilayer body are substantially continuous.

Thus, the multilayer reflective polymeric body of the present invention is made up of multiple optically thick layers, or a combination of optically thick and optically very thin layers, as opposed to the multilayer "thin film" articles of the prior art. For purposes of optical properties, i.e., reflectance and transmittance, a thin film can be described as a film thinner than one wavelength of light at which the film will be applied. Thus, for films to be used in the visible wavelength band, a thin film is described in the literature as one whose thickness,  $D$ , is less than about 0.5 micrometer or whose optical thickness,  $ND$  (where  $N$  is the refractive index of the material) is less than about 0.7 micrometers. Vasicek, Optics of Thin Films (1960) at pages 100 and 139.

Prior art thin film layer articles describe interference films which rely on the constructive optical interference of light to produce intense reflected coherent light in the visible, ultraviolet, or infrared portions of the electromagnetic spectrum according to the equation:

$$\lambda m = (2/m) (N_1 D_1 + N_2 D_2),$$

where  $\lambda m$  is the reflected wavelength in nanometers,  $N_1$  and  $N_2$  are the refractive indices of the alternating polymers,  $D_1$  and  $D_2$  are the thickness of the respective layers of polymers in nanometers, and  $m$  is the order of reflection ( $m=1,2,3,\dots$ ). Each solution of the equation determines a wavelength at which an intense reflection, relative to surrounding regions, is expected. The intensity of the reflection is a function of the "f-ratio" where,

$$f = N_1 D_1 / (N_1 D_1 + N_2 D_2)$$

By proper selection of the f-ratio, one can exercise some degree of control over the intensity of reflection of the various higher order reflections. For example, first order visible reflections of blue (0.38 micrometer wavelength) to red (0.68 micrometer wavelength) can be obtained with layer optical thicknesses between 0.075 - 0.25 micrometers. Ir-

5 As can be seen, such thin film polymeric bodies are strongly dependent upon film (and individual layer) thickness to determine reflected wavelength. Such thin films are extremely sensitive to thickness changes, and it is characteristic of such thin films to exhibit nonuniform streaks and spots of color.

The multi layer bodies of the present invention do not display vivid iridescence. In fact, it is an important object of this invention specifically to avoid layer thicknesses which result in substantial iridescent color. By the use of layers 10 sufficiently thick, to avoid iridescence alone or in combination with layers too thin to cause iridescence, result in a reflection which is essentially silver and non-iridescent. This silvery appearance is due to higher order reflections from the thick layers being so closely spaced that the human eye perceives the reflection to be essentially non-iridescent.

The optical thickness range which is avoided by the present invention is

$$15 \quad \lambda/4 < nd < 5 \lambda/4$$

where,  $\lambda$  = approximately 0.38 micrometers,  $n$  = refractive index of the polymer, and  $d$  = physical thickness of the layer in micrometers. Thus, in the practice of the present invention, the substantial majority of the thick layers have an optical thickness ( $nd$ ) of greater than  $5 \lambda/4$ , while the substantial majority of the very thin layers have an optical thickness of less than  $\lambda/4$ .

20 Articles made in accordance with the present invention exhibit a uniform silvery reflective appearance, not the multicolored, iridescent appearance common to prior art thin film multilayer articles. Rather, the reflective characteristics of the multilayer bodies of the present invention are governed by the following equation:

$$R = (kr)/(1 + (k - 1)r) \times 100,$$

25 where  $R$  is the amount of reflected light (percent),  $k$  is the number of thick film layers, and  $r = [(N_1 - N_2)/(N_1 + N_2)]^2$ . See Vasicek, Optics of Thin Films (1960) at pages 69-70.

This equation indicates that the intensity of the reflected light is a function only of the respective refractive indices of the two polymer components and the total number of layer interfaces. This relationship contrasts greatly with that of prior thin film articles whose reflectivity is highly sensitive to layer thickness and angle of view.

30 Thus, the reflected wavelength of light from the multilayer polymeric body of the present invention is independent of both individual layer and total structure thickness over a wide processing range. Uniformity of reflection is inherent in the design of the body. Moreover, a gradient of layer thickness through the thickness of the body is neither detrimental nor advantageous to the appearance of the body as long as a substantial majority of the individual layers of the polymers maintains an optical thickness equal to or greater than about 0.45 micrometers or equal to or less than 0.09 micrometers. 35 This again contrasts with prior thin film articles which reflect broad or narrow bandwidths depending upon layer thickness gradient.

Thus, it is not necessary for all of the layers in the reflective polymeric bodies of the present invention to have optical thicknesses of 0.45 micrometers or greater or 0.09 micrometers or less. The preferred coextrusion process for fabricating the polymeric bodies of the present invention may introduce layer thickness variations both through the 40 thickness of the body and in the plane of individual layers. Variation in layer thicknesses of each polymeric component can be as much as 300 percent or more. However, useful reflective bodies and articles may be made even with such wide variations as long as a substantial majority of the layers have an optical thickness of not more than 0.09 micrometers or not less than 0.45 micrometers. With this condition met, there is an absence of visibly perceived interference colors reflected from bodies and articles of the present invention.

45 The absence of the iridescent interference colors which characterize prior art thin films is somewhat subjective to the human eye. However, we have found that usually 75 percent of the layers in the body must have optical thicknesses greater than 0.45 micrometers or less than 0.09 micrometers to obtain the broad band, visually uniform reflectance of substantially all wavelengths (white light) which characterizes the present invention. A minority of 25 percent or fewer of the layers having optical thicknesses in the range of 0.1 to 0.45 micrometers have been found to have interference 50 reflections of a sufficiently low intensity so that the body will have essentially no visibly perceived iridescence.

The reflective polymeric bodies of the present invention become more highly reflective of incident light (i.e., transmit less light) as the number of layers is increased. Preferably, the number of layers is sufficient to produce an article which will reflect at least 30 percent of the incident light, for those wavelengths for which there is negligible absorption. Reflectances below about 30 percent are not sufficient to be readily observed. If it is desired to use the reflective 55 polymeric body of the present invention as a mirror, adding additional layers will increase the reflectance of the body to 50 percent or higher to produce a silvery, mirror-like appearance.

The reflectivity of the bodies is also dependent upon the difference in refractive index between the two polymers used. That is, the greater the difference in refractive index, the greater the reflectivity of the body. Accordingly, it can

be seen that the reflective nature of the polymeric bodies may be controlled by the selection of polymers having differing refractive indices and by fabricating the body to have additional layers. The relationship between percent reflection of light, difference in refractive index ( $\Delta N$ ) where the lower refractive index polymer was taken as a fixed value and the higher was varied to achieve a range of refractive index difference as shown in Figure 1b. The number of layers of material is illustrated in Figures 1a and 1b for a two component system.

The reflective multilayered polymeric bodies of the present invention may comprise alternating layers of a wide variety of generally transparent thermoplastic materials. Suitable thermoplastic resins, along with representative refractive indices, which may be used in the practice of the present invention include, but are not limited to: perfluoroalkoxy resins (refractive index = 1.35), polytetrafluoroethylene (1.35), fluorinated ethylene-propylene copolymers (1.34), silicone resins (1.41), polyvinylidene fluoride (1.42), polychlorotrifluoroethylene (1.42), epoxy resins (1.45), poly(butyl acrylate) (1.46), poly(4-methylpentene-1) (1.46), poly(vinyl acetate) (1.47), ethyl cellulose (1.47), polyformaldehyde (1.48), polyisobutyl methacrylate (1.48), polymethyl acrylate (1.48), polypropyl methacrylate (1.48), polyethyl methacrylate (1.48), polyether block amide (1.49), polymethyl methacrylate (1.49), cellulose acetate (1.49), cellulose propionate (1.49), cellulose acetate butyrate (1.49), cellulose nitrate (1.49), polyvinyl butyral (1.49), polypropylene (1.49), polybutylene (1.50), ionomeric resins such as Surlyn (trademark) (1.51), low density polyethylene (1.51), polyacrylonitrile (1.51), polyisobutylene (1.51), thermoplastic polyesters such as Ecdel (trademark) (1.52), natural rubber (1.52), perbunan (1.52), polybutadiene (1.52), nylon (1.53), polyacrylic imides (1.53), poly(vinyl chloro acetate) (1.54), polyvinyl chloride (1.54), high density polyethylene (1.54), copolymers of methyl methacrylate and styrene such as Zelon (trademark) (1.54), transparent acrylonitrile-butadiene-styrene terpolymer (1.54), allyl diglycol resin (1.55), blends of polyvinylidene chloride and polyvinyl chloride such as Saran resins (trademark) (1.55), polyalpha-methyl styrene (1.56), styrene-butadiene latexes such as Dow 512-K (trademark) (1.56), polyurethane (1.56), neoprene (1.56), copolymers of styrene and acrylonitrile such as Tyril resin (trademark) (1.57), copolymers of styrene and butadiene (1.57), polycarbonate (1.59), other thermoplastic polyesters such as polyethylene terephthalate and polyethylene terephthalate glycol (1.60), polystyrene (1.60), polyimide (1.61), polyvinylidene chloride (1.61), polydichlorostyrene (1.62), polysulfone (1.63), polyether sulfone (1.65), and polyetherimide (1.66). The refractive indices reported above may vary somewhat at different wavelengths. For example, the refractive index of polycarbonate is somewhat greater for light in the blue region of the spectrum and somewhat lower for light in the red region of the spectrum.

Copolymers of the above resins are also useful such as ethylene and vinyl alcohol, styrene and hydroxy ethylacrylate, styrene and maleic anhydride, styrene-butadiene block copolymers, styrene and methylmethacrylate, and styrene and acrylic acid. Other useful polymeric materials include polyetheretherketones, polybutene, maleic anhydride grafted polyolefins such as Admer (available from Mitsui Chemicals) and Plexar (available from Quantum Chemicals), and copolymers of ethylene and vinyl acetate such as CXA (available from du Pont). The latter three polymers are particularly useful as adhesive layers to bond other polymeric layers together in the multilayer construction.

A condition for the selection of the polymers to make up the alternating layers of the body is that the polymers selected have refractive indices which differ from each other by at least 0.03. Further, the polymers should be compatible in processing temperatures so that they may be readily coextruded. The combination of thick and very thin layers makes it possible to fabricate polymeric bodies which contain up to 80 percent or more by volume of a first polymer (the thick layers) and 20 percent or less by volume of a second polymer (the very thin layers). This may result in a multilayer structure which has properties similar to the first polymer alone. Further, the resulting laminate may form a structure stronger than would be possible using a combination of alternating thick layers alone.

Multilayer bodies in accordance with the present invention are most advantageously prepared by employing a multilayered coextrusion device as described in US-A-3,773,882 and US-A-3,884,606. Such a device provides a method for preparing multilayered, simultaneously extruded thermoplastic materials, each of which are of a substantially uniform layer thickness. Preferably, a series of layer multiplying means as are described in US-A-3,759,647.

The feedblock of the coextrusion device receives streams of the diverse thermoplastic polymeric materials from a source such as a heat plastifying extruder. The streams of resinous materials are passed to a mechanical manipulating section within the feedblock. This section serves to rearrange the original streams into a multilayered stream having the number of layers desired in the final body. Optionally, this multilayered stream may be subsequently passed through a series of layer multiplying means in order to further increase the number of layers in the final body.

The multilayered stream is then passed into an extrusion die which is so constructed and arranged that streamlined flow is maintained therein. Such an extrusion device is described in US-A-3,557,265. The resultant product is extruded to form a multilayered body in which each layer is generally parallel to the major surface of adjacent layers. The use of alternating thick and very thin layers decreases the tendency of the layers to intermix.

The configuration of the extrusion die can vary and can be such as to reduce the thickness and dimensions of each of the layers. The precise degree of reduction in thickness of the layers delivered from the mechanical orienting section, the configuration of the die, and the amount of mechanical working of the body after extrusion are all factors which affect the thickness of the individual layers in the final body. It is necessary, however, that the optical thickness of a substantial majority of the individual layers of polymeric material be not more than 0.09 micrometers or not less

than 0.45 micrometers.

Reflective polymeric bodies produced by the practice of the present invention may have a wide variety of potentially useful applications. For example, the bodies may be post formed into concave, convex, parabolic, half-silvered, etc. mirrors. If suitably flexible or rubbery polymers are utilized, the bodies may be bent or recoverably stretched into varying shapes. The mirror-like appearance may be accomplished by coextruding a black or otherwise light absorbing layer on one side of the body. Alternatively, one side of the final body may be coated with a colored paint or pigment to provide a highly reflective mirror-like body. Such mirrors would not be subject to breakage as would glass mirrors.

In some embodiments of the invention it may be desirable to incorporate coloring agents such as dyes or pigments into one or more of the individual layers of the polymeric body. This can be done to one or both of the outer or skin layers of the body, or alternatively, the coloring agent may be incorporated into one or more interior layers in the body. The coloring agents may be selected to give the polymeric body a metallic appearance other than its normal silvery appearance such as bronze, copper, or gold, for example.

Different colors such as black, blue, red, yellow, and white, may also be used. Typically, it is most desirable to use pigmented coloring agents in the interior layers to provide opaqueness and a mirror-like reflective quality and to use dyes on exterior surface layers. Coloring agents may be used in combination to provide desirable coloring and optical properties. For example, a pigmented white coloring agent may be used in an interior surface while a colored dye, such as blue, yellow, red, or green may be included on one or more surface layers to provide a unique reflective colored effect.

Further, while the normal surface of the body is smooth to give a highly reflective silver appearance, in some instances it may be desirable to give the surface of the body a roughened or brushed appearance to simulate a brushed metallic appearance. Further, a solvent may be used to etch the surface of the multilayer body to provide a matte or pewter look to the body. Additionally, the body may be embossed with a variety of patterns to provide desirable optical effects.

The reflective polymeric bodies may also be used as birefringent polarizers. Through proper selection of the polymeric materials making up the layers, a refractive index mismatch in one plane of the polarizer may be achieved. In a preferred method, the refractive index mismatch may be created after fabrication of the reflective polymeric body. The polymeric materials may be selected so that the first material has a positive stress optical coefficient and the second polymeric material has a negative stress optical coefficient. Stretching the body containing the two polymeric materials in a uniaxial direction causes them to orient and results in a refractive index mismatch in the plane of orientation to produce the polarizer. A broad band width of visible light passing through such bodies is polarized. This is in distinction to prior thin film multi layer polarizers which polarized only specific narrow wavelength ranges of light.

Additionally, the highly reflective polymeric bodies may be fabricated as non-corroding metallic appearing articles for indoor or outdoor exposure. For example, the polymeric bodies may be fabricated into automotive parts such as covers for air filters or brake fluids, mud flaps, running boards, louvers, laminates applied to metals or plastics as a finish, mirrors, mirror housings, wheel covers, trim such as interior, exterior, adhesive backed pinstriping tape, and lamp bezels, body panels, ornaments, luggage racks, knobs, handles, dashboards, and nameplates logos.

The parts may be formed by processes such as thermoforming, vacuum forming, shaping, rolling, or pressure forming. The bodies may also be formed into silvery or metallic appearing glasses, cups, trays, dishes, tower holders, toilet paper holders, pocket knife housings, compact mirrors (non-breakable), carnival fun-house mirrors, sequins, pet collars, shopping bags, Christmas tree decorations, wrapping paper, ribbons, boxes, reflectors, reflective clothing, and false fingernails.

The reflective polymeric bodies may also be used in household and construction materials such as, for example, fences to reflect noise from patio/lawn area from the street nearby, and make the space appear larger, windows having selective light transmission, decorative tiles, bath tubs, shower stalls, shower doors, ceiling tiles, ceiling supports, handrails, moldings for windows, trim, door frames, and skylight frames, hardware, such as knobs, trim, and hinges, paneling, gutters, reflective tape for gutters (such as for melting ice), fascia, spas, cabinets, flooring, roof tiles (to reflect heat off of a roof), fire protection sprinkler head skirts, mail boxes, garage doors, siding, and one-way mirrors. Other uses for the reflective polymeric bodies of the present invention include highway lane markers, on advertising, highway, or warning signs, as road edge markers, as reflective posts where the entire post is reflective and bendable, as temporary striping on the road surface to divide traffic lanes, or as pylons, on barricades, and on barriers. The reflective polymeric bodies may also be used as pinstriping (stick-on trim tape), trim moldings and parts, ornaments, rails, windows (privacy and solar reflecting), fenders (dock bumpers), door-way entry trim, buoys, trailer fenders, antennas, replacements for chrome plated hardware, boat hulls, canoes, sailboards, kneeboards, sails, surfboards, scuba gear, flash lamp reflector (for underwater photography), fishing lures, fishing poles, and nameplates and logos.

A number of different profiles may be coextruded in addition to sheets and films of the reflective polymeric materials. By profiles, we mean shaping of the multilayer body 1) in a forming die into sheets, channels, lenticular cross-sections, round or elliptical tubes, and parisons, or 2) outside of a die by a post forming procedure. For example, decorative moldings such as wall moldings and picture frame moldings, automotive trim, and home siding may be readily coex-

truded through forming dies. Use of a tubular extrusion die produces a multilayered metallic appearing pipe. Such tubular dies may also be used to produce parisons which may then be blow molded into silvery appearing bottles and containers. Because the materials used in the construction of the body may be selected for given desired properties, the final body may be flexible or rubbery, producing an article which could be used as a variable focal length reflector by flexing the article to different degrees.

The reflective polymeric bodies of the present invention may also be post formed into a wide variety of items such as two-way mirrors, black bodies for insulation, and solar intensifiers to concentrate solar radiation. The bodies may also be formed into dinnerware, tableware, containers, and packages. By the proper selection of the polymers which were used, such articles may be made to be microwavable.

Further, because of the use of very thin layers, the polymers of the present invention may be formed into films having a total thickness of 0.01 inches (0.25 mm) or less. Such reflective films could be used in applications which would exclude thicker sheets such as for reflective tape for clothing, reflective window shades, and craft where the reflective film can be easily cut with scissors by the user.

The use of alternating thick and very thin optical layers also provides a much more focused and sharper reflection from the surface of the polymeric body. This is due to the fact that the light rays reflected from the multiple layers are closer together, resulting in a sharper image as perceived by the eye.

In order that the invention may be more readily understood, reference is made to the following Examples, which are intended to be illustrative of the invention, but are not intended to be limiting in scope.

#### Example 1

Employing an apparatus as generally described in US-A-3,773,882 and US-A-3,759,647, a sheet of a reflective polymeric body was prepared. The sheet was approximately 0.05 inches (1.3 mm) in thickness and had 657 alternating layers (ABABAB) of polycarbonate (Calibre 300-22, trademark of The Dow Chemical Company) and polymethyl methacrylate (Cryo Acrylite H15-003, trademark of Cyro Industries). A substantial majority of the layers in the final sheet had optical thicknesses of at least 0.45 micrometers. The refractive index of the polycarbonate(PC) was 1.586, while the refractive index of the polymethylmethacrylate (PMMA) was 1.49.

The polycarbonate and polymethyl methacrylate materials were heat plastified in extruders maintained at between 500 and 520 degrees F (260° and 270°C) and fed to a feedblock at a rate of about 20 pounds per hour (9 kg/hr) to produce the multilayered core of the construction. Another extruder supplied outer skin layers of polycarbonate to the sheet at the rate of about 10 lb/hr (4.5 kg/hr). The resulting construction was spread in a coat hanger style die (width = 16 inches (410 mm), die gap = 0.05 inches (1.3 mm)) and cooled on a three roll sheet stack in an "S-rap" configuration.

Portions of the sheet were then thermoformed into various shapes such as reflective lenses, eating utensils, automotive emblems, and other items of complex geometry. Some of the shaped items were further enhanced by spray painting one side thereof a flat black color. This resulted in an intense silvery mirror-like appearance when the item was viewed from the opposite side. Additional portions of the sheet were stacked in seven plies and then heated under pressure to obtain an article having an even greater number of layers (i.e., 7 X 657). This resulted in a highly reflective article which required no painting with a black color to obtain a silvery, mirror-like appearance.

#### Example 2

Using the same apparatus and polymers as in Example 1, a reflective multilayer body having 1313 alternating core layers was coextruded. The polycarbonate was fed to the extrusion die at a rate of about 32.5 lb/hr (14.7 kg/hr) and the polymethyl methacrylate was fed a rate of about 17.5 lb/hr (7.9 kg/hr). Polycarbonate skin layers were fed at a rate of about 12.5 lb/hr (5.7 kg/hr). A reflective sheet was produced in which at least 75 percent of the layers had an optical thickness of at least 0.45 micrometers. No iridescent color was observed.

#### Example 3

Using the same apparatus and polymers as in Example 1, a reflective multilayer body having 1313 alternating core layers was coextruded. The polycarbonate was fed to the extrusion die at a rate of about 42.5 lb/hr (19.3 kg/hr) and the polymethyl methacrylate was fed a rate of about 7.5 lb/hr (3.4 kg/hr). Polycarbonate skin layers were fed at a rate of about 12.5 lb/hr (5.7 kg/hr). A reflective sheet was produced in which a substantial majority of the layers had an optical thickness of at least 0.45 micrometers. No iridescent color was observed.

#### Example 4

Three component reflective polymeric bodies having an ABCBA repeating layer pattern were produced using: as



the "A" layer, Dow Styron 685D polystyrene (specific gravity 1.04; refractive index 1.586); as the "B" layer, Richardson RPC-440 styrenemethylmethacrylate copolymer (specific gravity 1.13; refractive index 1.53); and as the "C" layer, Cyro Acrylite H15-003 polymethyl methacrylate (specific gravity 1.20; refractive index 1.49). The reflective body had 1313 layers of approximately equal average thickness (i.e., each of the layers A:B:C:B made up 25 percent of the core).  
 5 Mass flow rates to the extruders was 9.3 lb/hr (4.2 kg/hr) for the polystyrene (PS), 21.0 lb/hr (9.5 kg/hr) for the styrene-methylmethacrylate copolymer (SMMA), and 11.7 lb/hr (5.3 kg/hr) for the polymethyl methacrylate (PMMA). The body included a skin layer of polystyrene (Dow Styron 685D) extruded at a mass flow rate of approximately 12.0 lb/hr (5.4 kg/hr). A reflective sheet was produced in which a substantial majority of the layers had an optical thickness of at least 0.45 micrometers. No iridescent color was observed.

#### Example 5

A three component reflective body was produced as in Example 4 except that the layer thickness ratio was 33:16.7:33:16.7 (A:B:C:B percent of the total core layers). Extruder rates of 16.7 lb/hr (7.6 kg/hr) for the PS, 15.0 lb/hr  
 15 (6.8 kg/hr) for the SMMA, and 16.0 lb/hr (7.3 kg/hr) for the PMMA were used. A reflective sheet was produced in which a substantial majority of the layers had an optical thickness of at least 0.45 micrometers. No iridescent color was observed.

#### Example 6

A three component reflective body was produced as in Example 4 except that the layer thickness ratio was 41.0:8.6:41.8:8.6 (A:B:C:B percent of the total core layers). Extruder rates of 25.6 lb/hr (11.6 kg/hr) for the PS, 22.0 lb/hr  
 20 (10 kg/hr) for the SMMA, and 30.0 (13.6 kg/hr) lb/hr for the PMMA were used. A reflective sheet was produced in which a substantial majority of the layers had an optical thickness of at least 0.45 micrometers. No iridescent color was observed.

#### Example 7

In order to determine at what point thin layer optical thickness interference effects become pronounced, each of  
 30 the reflective samples prepared in Examples 1 - 6 above were tested by heating and stretching them through iridescence to the point of transparency. All of the samples were then visually inspected and measured to determine: 1) total sample thickness at which a first order reflected blue band was observed, and 2) total sample thickness at which little color was observed and the sample displayed substantially uniform silvery reflectance. Average individual layer thickness for each component was then calculated from known relative compositions of the core and skin layers as measured  
 35 by microscopy.

The calculated thicknesses were then multiplied by the respective refractive indices of the components to obtain values for optical thickness. The results are compared to theoretically calculated optical thickness in Table I below.

Sample #	Example	Composition	1st Order Blue Theoretical avg. optical thickness, $\mu\text{m}$	1st Order Blue Measured/Calculated avg. optical thickness, $\mu\text{m}$	5th Order Band Theoretical avg. optical thickness, $\mu\text{m}$	Transition to Uniform Reflectance Measured/Calculated avg. optical thickness, $\mu\text{m}$
<b>2 Component</b>						
PC/PMMA						
C8801020 35 C	1	50:50	0.098 0.092	0.141 0.129	0.45 0.85	PC PMMA 0.811 0.790
C8900103 19 B	2	45:55	0.127 0.084	0.314 0.058	0.45 0.85	1.598 0.808
C8900103 17 B	3	85:15	0.163 0.027	0.187 0.028	0.45 0.85	3.339 0.553
<b>3 Component</b>						
PS:SMMA:PMMA:SMMA						
C8900103 29 A	4	25:35:35:25	0.049 0.047 0.048 0.047	0.044 0.043 0.042 0.043	PS SMMA PMMA SMMA 0.45 0.85	PS SMMA PMMA SMMA 0.818 0.789 0.769 0.789
C8900103 29 B	5	35:16:7:33:16:7	0.065 0.032 0.061 0.032	0.053 0.031 0.050 0.031	0.45 0.85	1.745 0.842 1.639 0.842
C8900103 31 A	6	41:1:8:6:41:8:8:6	0.081 0.016 0.076 0.016	0.086 0.017 0.082 0.017	0.45 0.85	2.442 0.511 2.483 0.511

First order blue theoretical was calculated by:

$\lambda_1 = 2 \times$  (sum of optical thicknesses of optical repeat unit components)  
 where,  $\lambda_1 =$  visible blue = 0.38 micrometers, and sum of optical thicknesses =  $N_1 D_1 + N_2 D_2$  for PC:PMMA and  
 $= N_1 D_1 + N_2 D_2 + N_3 D_3 + N_4 D_4$  for  
 PS:SMMA:PMMA:SMMA Fifth order band theoretical was calculated by:

5  $5(\lambda/4) =$  optical thickness of minor component where, 0.38 micrometers  $< \lambda < 0.68$  micrometers.

Referring to Table I, it can be seen that there is very good agreement between theoretical and measured optical thicknesses for first order blue reflections and optical thicknesses are in the general range taught by prior art thin layer iridescent film patents. The measured optical thicknesses of the transition from very faint iridescent color to substantially uniform reflectance of all wavelengths was found to occur when the average optical thickness of the minor component  
 10 was greater than 0.45 micrometers. Disappearance of faint iridescent color correlates very well with the theoretical optical thickness range of the minor component for the fifth order band (0.45 to 0.85 micrometers) as shown in Table I.

#### Example 8

15 Employing an apparatus as generally described in US-A-3,773,882 and US-A-3,759,647, a sheet of a reflective polymeric body having alternating thick and very thin layers was prepared. The sheet had 657 alternating layers (ABABAB) of polycarbonate (Calibre 300-22, trademark of Dow Chemical Company) and polymethyl methacrylate (Cyro Acrylite H15-002, trademark of Cyro Industries) and two outer skin layers of the polycarbonate. The polycarbonate was used to form the optically thick layers and made up about 92.3 percent by weight of the sheet, while the polymethyl  
 20 methacrylate was used to form the optically very thin layers and made up only about 7.7 percent by weight of the sheet.

A substantial majority of the optically thick polycarbonate layers in the final sheet had optical thicknesses of at least 0.45 micrometers, and a substantial majority of the optically very thin layers of polymethyl methacrylate had optical thicknesses of 0.09 micrometers or less. The refractive index of the polycarbonate (PC) was 1.586, while the refractive index of the polymethyl methacrylate (PMMA) was 1.49.

25 The polycarbonate and polymethyl methacrylate materials were heat plastified in extruders maintained at between 500 to 520 degrees F (260° to 270°C) and fed to a feedblock from separate extruders. The polycarbonate was fed from two separate extruders at rates of 22.8 (10.3 g/hr) and 27.4 lb/hr (12.4 kg/hr), respectively, and the polymethyl methacrylate was fed from a third extruder at a rate of 4.2 lb/hr (1.9 kg/hr), to produce the multilayered core of the construction. Another extruder supplied outer skin layers of polycarbonate to the sheet at the rate of 11.5 lb/hr (5.2  
 30 kg/hr). The resulting sheet reflected substantially white light and appeared silvery; no iridescent color was observed.

#### Example 9

35 Using the same apparatus as in Example 8, a reflective multilayer body having 657 alternating core layers of polycarbonate and polymethyl methacrylate and two outer skin layers of polycarbonate was coextruded. The polycarbonate was Calibre 200-22, trademark of The Dow Chemical Company and the polymethyl methacrylate was Cyro Acrylite H15-002, trademark of Cyro Industries. The polycarbonate was used to form the optically thick layers and made up 95.3 percent by weight of the sheet including cap layers, while the polymethyl methacrylate was used to form the optically very thin layers and made up only about 4.7 percent by weight of the sheet.

40 A substantial majority of the optically thick polycarbonate layers in the final sheet had optical thicknesses of at least 0.45 micrometers, and a substantial majority of the optically very thin layers of polymethyl methacrylate had optical thicknesses of 0.09 micrometers or less. The refractive index of the polycarbonate (PC) was 1.586, while the refractive index of the polymethyl methacrylate (PMMA) was 1.49.

45 The polycarbonate and polymethyl methacrylate materials were heat plastified in extruders maintained at between 500 and 520 degrees F (260 and 270°C) and fed to a feedblock from separate extruders. The polycarbonate was fed from two separate extruders at rates of 40.0 lb/hr (18.1 kg/hr), and the polymethyl methacrylate was fed from a third extruder at a rate of 4.4 lb/hr (2.0 kg/hr), to produce the multilayered core of the construction. Another extruder supplied outer skin layers of polycarbonate to the sheet at the rate of 9.0 lb/hr (4.1 kg/hr). The resulting sheet reflected sub-  
 50 stantially white light and appeared silvery; no iridescent color was observed.

#### Claims

55 1. A reflective polymeric body of at least first and second diverse polymeric materials and having a plurality of alternating layers of said first and second polymeric materials differing from each other in refractive index by at least 0.03, characterised in that at least 75 percent of the individual layers of said body have an optical thickness which is either not more than 0.09 micrometers or not less than 0.45 micrometers, with at least one of the individual layers having an optical thickness not less than 0.45 micrometers, and the number of said alternating layers is

such that substantially no visible iridescence can be perceived in the light reflected, by the body.

2. A reflective polymeric body as claimed in Claim 1, wherein at least 30 percent of light incident on said body is reflected.
- 5 3. A reflective polymeric body as claimed in Claim 1 or Claim 2, wherein at least 75 percent of said layers have an optical thickness of at least 0.45 micrometers and a majority of the remaining layers have an optical thickness of 0.09 micrometers or less.
- 10 4. A reflective polymeric body as claimed in any one of the preceding claims, wherein at least 80 volume percent of the combined volume of said first and second polymeric materials constituting said alternating layers is provided by the optically thicker layers, and the balance is provided by the optically thinner layers.
- 15 5. A reflective polymeric body as claimed in any one of the preceding claims, wherein said first polymeric material is polycarbonate or rigid polyurethane and said second polymeric material is polymethyl methacrylate.
6. A reflective polymeric body as claimed in any one of Claims 1 to 4, wherein said first polymeric material is a flexible polyurethane and said second polymeric material is a polyether amide.
- 20 7. A reflective polymeric body as claimed in any one of Claims 1 to 4, wherein said first and second polymeric materials are elastomers.
8. A reflective polymeric body as claimed in any one of the preceding claims, comprising first (A), second (B), and third (C) diverse polymeric materials in alternating layers in a pattern ABCBA.
- 25 9. A reflective polymeric body as claimed in Claim 8, wherein said first polymeric material is polystyrene, said second polymeric material is a styrene hydroxy ethylacrylate copolymer, and said third polymeric material is polymethyl methacrylate.
- 30 10. A reflective polymeric body as claimed in any one of the preceding claims, wherein a coloring agent is incorporated into at least one layer of said polymeric body.
11. A reflective polymeric body as claimed in any one of the preceding claims, comprising a barrier layer as either an exterior or interior layer of said body.
- 35 12. A reflective polymeric body as claimed in any one of the preceding claims, wherein said polymeric body is in the form of a mirror.
- 40 13. A reflective polymeric body as claimed in Claims 1 to 11, wherein said polymeric body is constituted by a birefringent polarizer, and wherein said first and second polymeric materials differ from each other in refractive index by at least 0.03 in one plane of the polarizer.
- 45 14. A reflective polymeric body as claimed in Claim 13, wherein the difference in refractive index between said first and second polymeric materials is caused by stretching said materials in a uniaxial direction to orient said polymeric materials.
15. A reflective polymeric body as claimed in any one of the preceding claims, wherein said body comprises at least 100 layers.
- 50 16. A reflective polymeric body as claimed in any one of the preceding claims, wherein said body comprises at least 500 layers.
17. A reflective body as claimed in any one of the preceding claims in the form of a shaped article.

55

#### Patentansprüche

1. Ein reflektierender polymerer Körper aus wenigstens einem ersten und davon unterschiedlichen zweiten polyme-

ren Material mit einer Mehrzahl von alternierenden Schichten dieses ersten und zweiten polymeren Materials, die sich im Brechungsindex um wenigstens 0,03 unterscheiden.

5 **dadurch gekennzeichnet,**  
daß wenigstens 75% der einzelnen Schichten dieses Körpers eine optische Dicke aufweisen, die entweder nicht größer als 0,09 µm oder nicht geringer als 0,45 µm ist, wobei wenigstens eine der einzelnen Schichten eine optische Dicke von nicht weniger als 0,45 µm aufweist und die Zahl dieser alternierenden Schichten so ist, daß im wesentlichen keine sichtbare Irisierung in dem von dem Körper reflektierten Licht wahrgenommen werden kann.

10

2. Ein reflektierende polymerer Körper nach Anspruch 1,

**dadurch gekennzeichnet,**  
daß wenigstens 30% des auf diesen Körper auftreffenden Lichtes reflektiert wird.

15

3. Ein reflektierender polymerer Körper nach Anspruch 1 oder 2,

**dadurch gekennzeichnet,**  
daß wenigstens 75% dieser Schichten eine optische Dicke von wenigstens 0,45 µm aufweisen und eine Mehrheit der verbleibenden Schichten eine optische Dicke von 0,09 µm oder weniger aufweist.

20

4. Ein reflektierender polymerer Körper nach einem der vorstehenden Ansprüche,

**dadurch gekennzeichnet,**  
daß wenigstens 80 Vol.-% des Gesamtvolumens dieses ersten und zweiten polymeren Materials, die diese alternierenden Schichten aufbauen, durch die optisch dickeren Schichten und der Rest durch die optisch dünneren Schichten bereitgestellt wird.

25

5. Ein reflektierender polymerer Körper nach einem der vorstehenden Ansprüche

30

**dadurch gekennzeichnet,**  
daß dieses erste polymere Material Polycarbonat oder starres Polyurethan ist und dieses zweite polymere Material Polymethylmethacrylat ist.

35

6. Ein reflektierender polymerer Körper nach einem der Ansprüche 1 bis 4,

**dadurch gekennzeichnet,**  
daß dieses erste polymere Material ein flexibles Polyurethan ist und dieses zweite polymere Material ein Polyetheramid ist.

40

7. Ein reflektierender polymerer Körper nach einem der Ansprüche 1 bis 4,

**dadurch gekennzeichnet,**  
daß dieses erste und zweite polymere Material Elastomere sind.

45

8. Ein reflektierender polymerer Körper nach einem der vorstehenden Ansprüche, der erstens (A), zweitens (B) und drittens (C) unterschiedliche polymere Materialien in alternierenden Schichten in einem Muster ABCBA enthält.

9. Ein reflektierender polymerer Körper nach Anspruch 8,

50

**dadurch gekennzeichnet,**  
daß dieses erste polymere Material Polystyrol ist, dieses zweite polymere Material ein Styrolhydroxyethylacrylatcopolymer ist und dieses dritte polymere Material Polymethylmethacrylat ist.

55

10. Ein reflektierender polymerer Körper nach einem der vorstehenden Ansprüche,

**dadurch gekennzeichnet,**  
daß ein Färbemittel in wenigstens eine Schicht dieses polymeren Körpers eingebracht ist.

11. Ein reflektierender polymerer Körper nach einem der vorstehenden Ansprüche, der eine Barrierschicht als entweder äußere oder innere Schicht dieses Körpers enthält.

12. Ein reflektierender polymerer Körper nach einem der vorstehenden Ansprüche,

**dadurch gekennzeichnet,**  
daß dieser polymere Körper in Form eines Spiegels vorliegt.

13. Ein reflektierender polymerer Körper nach einem der Ansprüche 1 bis 11,

**dadurch gekennzeichnet,**  
daß dieser polymere Körper aus einem doppelbrechenden Polarisator aufgebaut ist und worin diese ersten und zweiten polymeren Materialien sich voneinander im Brechungsindex um wenigstens 0,03 in einer Ebene des Polarisators unterscheiden.

14. Ein reflektierender polymerer Körper nach Anspruch 13,

**dadurch gekennzeichnet,**  
daß der Unterschied im Brechungsindex zwischen diesen ersten und zweiten polymeren Materialien durch Strecken dieser Materialien in einer uniaxialen Richtung, um diese Polymerstoffe auszurichten, erzeugt wird.

15. Ein reflektierender polymerer Körper nach einem der vorstehenden Ansprüche,

**dadurch gekennzeichnet,**  
daß dieser Körper wenigstens 100 Schichten enthält.

16. Ein reflektierender polymerer Körper nach einem der vorstehenden Ansprüche,

**dadurch gekennzeichnet,**  
daß dieser Körper wenigstens 500 Schichten enthält.

17. Ein reflektierender Körper nach einem der vorstehenden Ansprüche in der Form eines geformten Gegenstandes.

## Revendications

1. Corps polymère réfléchissant constitué d'au moins une première et une deuxième matières polymères différentes et comportant une pluralité de couches alternées desdites première et deuxième matières polymères dont les indices de réfraction diffèrent l'un de l'autre d'au moins 0,03, caractérisé en ce qu'au moins 75 pour-cent des couches individuelles dudit corps ont une épaisseur totale qui, soit, ne dépasse pas 0,09 µm, soit n'est pas inférieure à 0,45 µm, au moins une des couches individuelles ayant une épaisseur optique non inférieure à 0,45 µm, et le nombre desdites couches alternées est tel qu'essentiellement aucune iridescence visible ne puisse être perçue dans la lumière réfléchie par le corps.

2. Corps polymère réfléchissant selon la revendication 1, dans lequel au moins 30 pour-cent de la lumière incidente sur ledit corps sont réfléchis.

3. Corps polymère réfléchissant selon l'une des revendications 1 ou 2, dans lequel au moins 75 pour-cent desdites couches ont une épaisseur optique d'au moins 0,45 µm et une majorité des couches restantes a une épaisseur optique de 0,09 µm ou moins.

4. Corps polymère réfléchissant selon l'une des revendications précédentes, dans lequel au moins 80 pour-cent en volume du volume combiné desdites première et deuxième matières polymères constituant lesdites couches alternées sont fournis par les couches optiquement plus épaisses, et le complément est fourni par les couches optiquement plus minces.

5. Corps polymère réfléchissant selon l'une des revendications précédentes, dans lequel ladite première matière polymère est du polycarbonate ou du polyuréthane rigide et ladite deuxième matière polymère est du poly(mé-

thacrylate de méthyle).

6. Corps polymère réfléchissant selon l'une des revendications 1 à 4, dans lequel ladite première matière polymère est un polyuréthane flexible et ladite deuxième matière polymère est un polyétheramide.
7. Corps polymère réfléchissant selon l'une des revendications 1 à 4, dans lequel lesdites première et deuxième matières polymères sont des élastomères.
8. Corps polymère réfléchissant selon l'une des revendications précédentes, comprenant une première matière polymère (A), une deuxième matière polymère (B) et une troisième matière polymère (C), ces polymères étant différents et disposés en couches alternées selon un motif ABCBA.
9. Corps polymère réfléchissant selon la revendication 8, dans lequel ladite première matière polymère est du polystyrène, ladite deuxième matière polymère est un copolymère styrène/hydroxyéthylacrylate et ladite troisième matière polymère est du poly(méthacrylate de méthyle).
10. Corps polymère réfléchissant selon l'une des revendications précédentes, dans lequel un agent colorant est incorporé dans au moins une couche dudit corps polymère.
11. Corps polymère réfléchissant selon l'une des revendications précédentes, comprenant une couche barrière sous la forme d'une couche soit extérieure, soit intérieure dudit corps.
12. Corps polymère réfléchissant selon l'une des revendications précédentes, dans lequel ledit corps polymère est sous forme de miroir.
13. Corps polymère réfléchissant selon les revendications 1 à 11, dans lequel ledit corps polymère constitue un polariseur biréfringent, et dans lequel lesdites première et deuxième matières polymères ont un indice de réfraction différant d'au moins 0,03 dans un plan du polariseur.
14. Corps polymère réfléchissant selon la revendication 13, dans lequel la différence des indices de réfraction desdites première et deuxième matières polymères est fabriquée par l'étirement desdites matières dans une direction uniaxiale pour orienter lesdites matières polymères.
15. Corps polymère réfléchissant selon l'une des revendications précédentes, dans lequel ledit corps comprend au moins 100 couches.
16. Corps polymère réfléchissant selon l'une des revendications précédentes, dans lequel ledit corps comprend au moins 500 couches.
17. Corps réfléchissant selon l'une des revendications précédentes sous forme d'un article façonné.

Fig. 1a

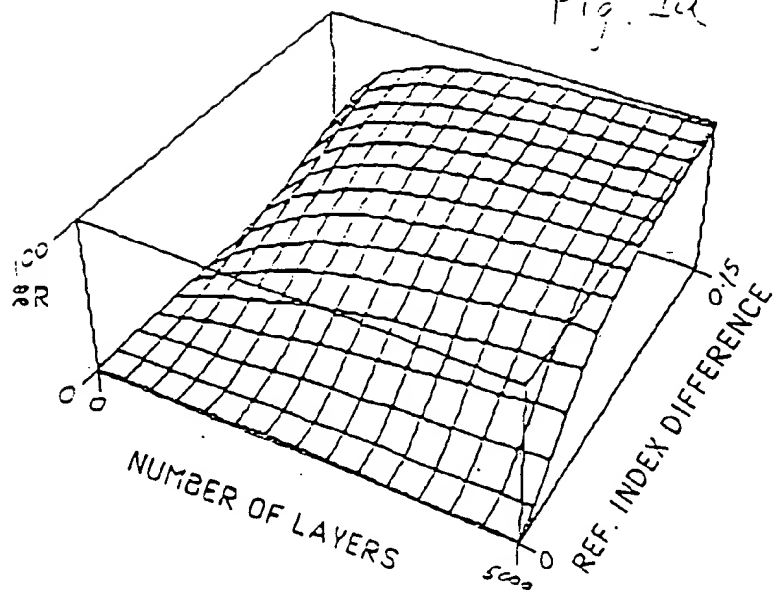


Fig. 1b

